




**01B5  
01B5P**

**Conterbalanced  
Electric  
Swivel Crane**

**Capacity 500 kg**

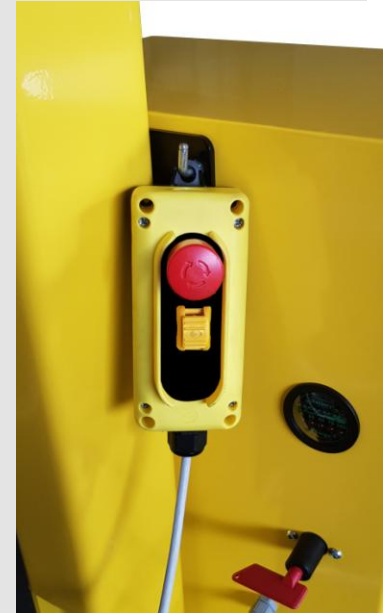

Mod.**01B5/01B5P** is an extremely versatile, easy to operate crane.  
Suitable for lifting loads up to 500 kg of various shapes and dimensions from the ground to machines,  
assembly lines, and anywhere needed.

Ideal to place moulds, spare parts and various products on machine tools with perimeter protections or  
narrow openings (presses, lathes, milling machines)




The crane is equipped with a handy push-buttons board for electric lifting and lowering.

Mod. **01B5/01B5P** is an essential tool in any workshop



## 01B5 01B5P

Ideal to place moulds, spare parts and various products on machine tools with perimeter protections or narrow openings

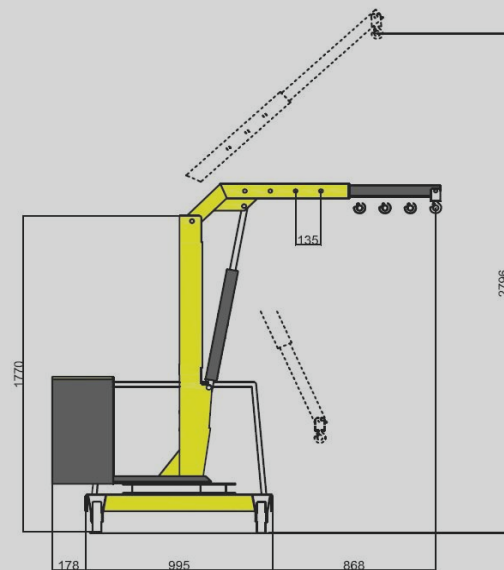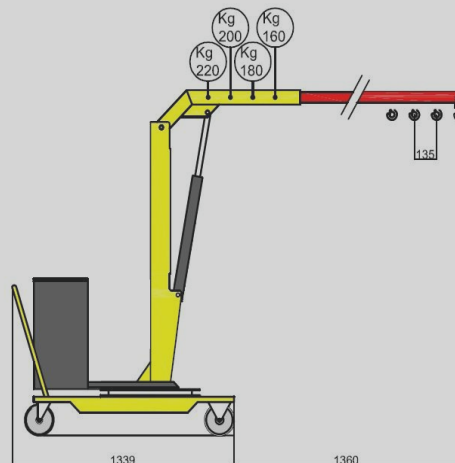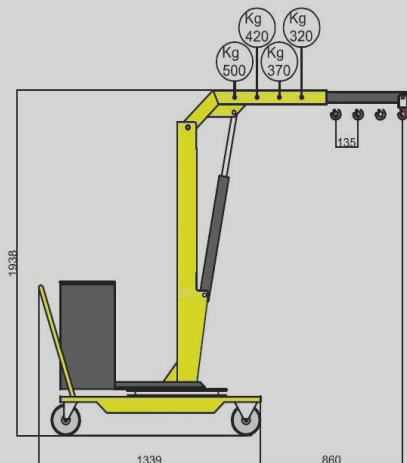

### TECHNICAL DATA

Weight	[kg]	650
Max capacity	[kg]	500
Max lifting time	[sec]	17
Max lowering time	[sec]	25
Max pressure	[BAR]	150
Battery	[V]	12
	[A]	80
Power	[W]	300
Tank capacity	[L]	1,5

### CYLINDER

Stroke	Ø	Ø Stem
[mm]	[mm]	[mm]
500	60	40

Mod. **01B5/01B5P** comes with a revolving jib extendible in 4 positions.

The cylinder has a burst valve that forbids the falling of load in the event of hose failure.

The pump is equipped with a pressure relief valve that prevents operating above maximum capacity.

Lowering speed can be regulated by means of a valve which is mounted underneath the cylinder.

Extension jib is also available on demand to increase outreach up to 1360 mm

Mod. 01B5/01B5P allows the handling of loads to be carried out in compliance with health and safety norms

### OUTREACH WITH STANDARD JIIB

Pos.	Length [mm]	Capacity [kg]
1	455	500
2	590	420
3	725	370
4	860	320

### OUTREACH WITH EXTENSION JIIB

Pos.	Length [mm]	Capacity [kg]
1	955	220
2	1090	200
3	1225	180
4	1360	160