

Mast lifts for indoor use

Our series of compact and flexible mast lifts for working safely indoors. Our lifts are characterised by low entry, short turning radius and low weight.

They make working at height efficient and safe, eliminating the need for ladders.

Our lifts are manufactured in Sweden and are CE marked in accordance with the high standards of safety in the EC and EN280 standards.





Areas of use

Our products are developed to facilitate work in, for example, trade, installation, cleaning, property upkeep, warehouse and construction industry.

All our products are easy to use and maintain. All lifts are delivered assembled and ready to start. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.

It hardly becomes any smoother than that.





OUR PRODUCTS

All our models are manufactured with a working height of 4.95 m. The mast lifts are safe and easy to use and require minimal maintenance. The lifts are delivered ready for use on EU pallets. At the end of the working day, the lift is connected to a standard wall outlet and the built-in charger charges the batteries.



PushAround

Manually moved to where it's needed.






MoveAround

Operated with a joystick from the basket.



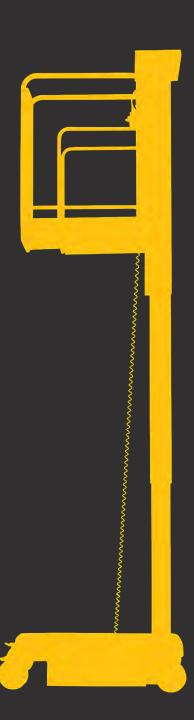



ADVANTAGES



Decoupling

The drive is disconnected with a simple grip and the lift is manually moved.



Operating instructions

A smart compartment makes the instruction manual always easily accessible.



Small turning radius

With a small turning radius of 1.2m, the lift easily takes the corner.



Anchorage point

When the harness is required.



USB socket

USB sockets are available for easy charging of tablet or mobile device.



Emergency stop

If the accident is close by.



SPECIFICATIONS

Size of the platform	. 0.53 x 0.76 m
Total load on the platform	. Max 180 kg
Total number of people	. Max 1
Working height	. 4.95 m
Height of platform	. 2.95 m
Lifting speed (2.95 m)	. 16 seconds
Weight	. 320 kg
Total width	. 0.76 m
Total height	. 1.64 m
Total length	. 1.2 m
MoveAround driving speed lowered	. 4 km/h
MoveAround driving speed raised	. 2 km/h
Power source	. 2 pcs 75 Ah (C20)
	12 V batteries, maintenance-free
Line voltage	. 24 V
Battery charger	. 230 V, 50 Hz / 60 Hz
Lifting system	. Single manoeuvred hydraulic cylinder
Wheels	. Diameter 200 mm, polyurethane coating,
	leaves no marks
Parking brakes for PushAround	. Manual foot brakes
Parking brakes for MoveAround	. Automatic
Height of the platform's railing	, 1.1 m
Height of skirting board	. 0.15 m
	(+

Address:

Unit 16 Hawksley Court Hawksley Street Industial Estate

Oldham

OL8 4PQ

Website: www.liftsafe.net info@lifsafe.net E-mail: