



01B2SE

360° pivoting arm

4 -function distributor

Capacity
200 kg



Lift Safe Ltd Unit 16 Hawksley Court, Hawksley Street Industrial Estate, Oldham, OL8 4PQ info@liftsafe.net - www.liftsafe.net - +44(0) 161 626 9628






01B2SE

Extremely precise placement with infinite adjustment speed



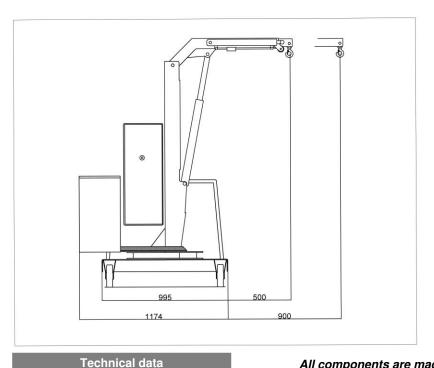

| | | 2800 |
|----------|-------------|------|
| | | |
| in Italy | 930 1330 | |

| AII | compone | ents are | made | in | Italv |
|-----|---------|----------|------|----|-------|
| | 00 | | | | , |

| reominoar data | | | |
|----------------|------|-------|------|
| Weigh | t | [kg] | 410 |
| Max capacity | | [kg] | 200 |
| Max press | sure | [BAR] | 100 |
| Б.: | | [V] | 12 |
| Battery | | [A] | 80 |
| Power | | [W] | 300 |
| Tank capacity | | [L] | 1,5 |
| | | | |
| Cylinder | | | |
| 0. 1 | - 4 | | d a. |

| Cylinder | | | | |
|----------|------|--------|--|--|
| Stroke | Ø | Ø Stem | | |
| [mm] | [mm] | [mm] | | |
| 470 | 60 | 40 | | |

| Standard jib outreach and capacity | | | |
|--|------------------------|--|--|
| Length | From 485 mm to 885 mm | | |
| Capacity | From 200 kg to 130 kg | | |
| Optional extension jib outreach and capacity | | | |
| Length | From 930 mm to 1330 mm | | |
| Capacity | From 92 kg to 71 kg | | |

This crane allows to carry out placements in full compliance with Health and Safety norms.

1

<u>Suitable to operate in tiny spaces</u> <u>thanks to its small frontal size</u> (995mm)

